

Oxygen Optode 4831W/4831/4831F



The Oxygen Optode 4831 is a compact fully integrated sensor for measuring O₂ concentration and temperature. 4330W is equipped with ultra-stable foil FDO701, while 4330F is equipped with fast response sensing foil Pst3 (See Sensing Foil Considerations overleaf).


- Optical lifetime-based luminescence quenching measurement principle
- Multipoint calibrated in 40 points
- Long time stability with pre-burned foil and red reference LED
- Low maintenance needs
- Not stirring sensitive (it consumes no oxygen)
- User friendly
- Small size and weight
- Stand-alone sensor
- Output format: RS232 and analog 0-5V
- Three depth ranges maximum 12000 meter

The Aanderaa Oxygen Optodes were the first to measure dissolved oxygen for years with low drift and high accuracy. By introducing the FDO701 foil on our deepwater sensors, the drift and pressure effects becomes a factor of two lower. Aanderaa Oxygen Sensor is designed to measure absolute oxygen concentration and % saturation. The oxygen optodes are used from streams to deep sea, from Aquaculture to Waste water and from Polar ice areas to Hydrothermal vents. The lifetime-based luminescence quenching principle offers a list of benefits. More than 200 scientific papers have so far been published using Aanderaa optodes.

AANDERAA


a xylem brand

Specifications OXYGEN SENSOR 4831W/4831/4831F

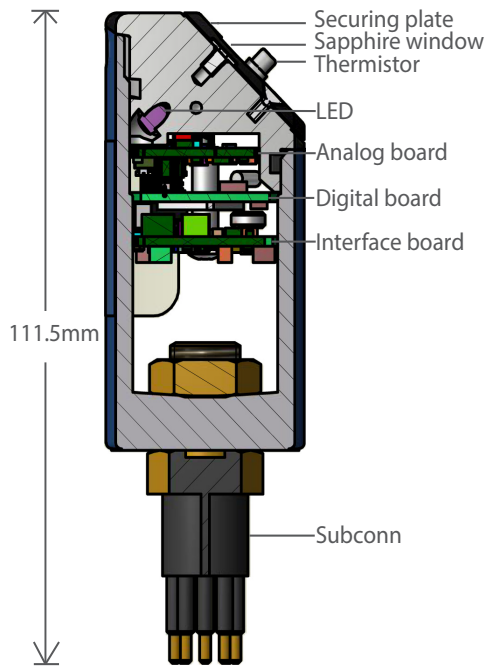

PIN CONFIGURATION SUBCONN MCBH8

Male Face View

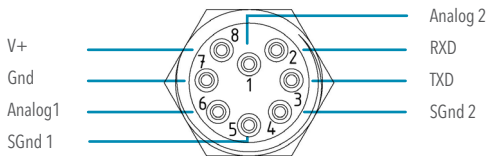


PIN CONFIGURATION SUBCONN MCBH6

Male Face View



Sensing Foil Considerations

The Pst3 & FDO701 sensing foils are protected by an optical isolation layer which makes the foil extra rugged and insensitive to direct sunlight. The fast response sensing foil is not equipped with this layer; ambient light intensity higher than 15000 lux may cause erroneous readings. We recommend the more rugged and stable FDO701 foil in applications where fast response is not needed.

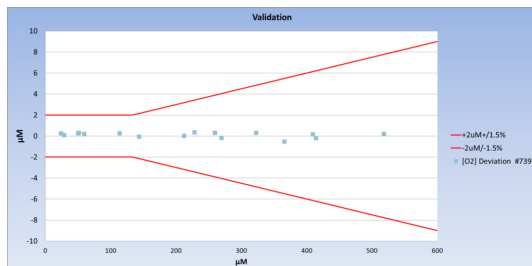

Typical validation in 20 points after calibration

Aanderaa Data Instruments AS

Sanddalsringen 5b
P.O. Box 103 Midtun
5843 Bergen, Norway

+47 55 60 48 00
aanderaa.info@xyleminc.com
Aanderaa.com

Conductivity Sensor is a trademark of Xylem or one of its subsidiaries.
© 2020 Xylem, Inc. XAD403 1122

Technical Details

Oxygen: Measurement Range: Calibration method:	O₂ Concentration 0 - 1000 µM ⁽¹⁾ 40-point automatic calibration, 20-point verification, 3 fully Winkler calibrated optodes for referencing	Air Saturation 0 - 300%
Sensing Foils:	Pre-burned PreSens Pst3 foils Pre-burned Xylem FDO701 foils Fast Response Foil	
Calibration Range: Resolution: Accuracy: Response Time (63%): 4831F 4831 4330W	0 - 500 µM ⁽²⁾ < 0.1 µM ⁽³⁾ < 2 µM or 1.5% ⁽⁴⁾	0 - 150% 0.05 % < 1.5 % ⁽⁵⁾
Typical field drift: Pst3 foil FDO701 foil	(with fast response foil) (with standard foil) (with FDO701 foil)	< 8 sec < 25 sec < 30 sec
Pressure effects: Pst3 & Pst3Fast foils FDO701 foil Foil Lifetime:	3 % lower per 1000 m 1.5 % lower per 1000 m + 10 years, do not change foil unless mechanically damaged.	
Temperature: Range: Resolution: Accuracy: Typical field drift: Response Time (63%):	-5 to +40°C (23-104°F) 0.01°C (0.018°F) ± 0.03°C (0.054°F) ⁽⁶⁾ < 0.03 degC per year < 2 sec	
Output format:	RS-232, 0-5V	
Output Parameters: RS-232	O ₂ Concentration in µM, Air Saturation in %, Temperature in °C, Oxygen raw data and Temperature raw data	
Analog channel 1: Analog channel 2:	O ₂ Concentration in µM, or Air Saturation in % Temperature in °C	
Sampling interval:	2 sec - 255 min	
Supply voltage:	5 to 14VDC, 7 to 14VDC for analog output	
Current drain: Average: Maximum: Quiescent:	0.16 + 48mA/S where S is sampling interval in seconds 100mA 0.16mA	
Operating depth: Intermediate Water (IW): Deep Water (DW): Hadal ⁽⁷⁾ :	0-3000m (0-9843ft) 0-6000m (0-19690ft) 0-12000m (0-39,380ft)	
Electrical connection: 4831U:	8 pin Subconn MCBH8M 6 pin Subconn MCBH6M	
Dimension (WxDxH):	Ø36 x 111.5mm (Ø1.4" x 4.4")	
Weight:	217g (7.65oz)	
Materials:	Epoxy coated titanium, PA	
Accessories, not included	Foil Service Kit 4733/47330 (Pst3 standard) Foil Service Kit 4794 (Pst3 fast) Foil Service Kit 5551 (FDO701)	

(1) O₂ concentration in µM = µmol/l.
To obtain mg/l, divide by 31.25
(2) Other ranges available on request.
(3) FDO701 foils have 0.02 µM resolution at
low concentrations.
(4) Requires salinity compensation for
salinity variations > 1mS/cm, and pressure
compensation for pressure > 100meter

(5) Within calibrated range 0 - 120% / 0 - 30°C
(6) Within calibrated range 0 - 30°C. Enhanced
calibration 0.003° C accuracy available for
additional costs
(7) Product number 5331

**Specifications subject to change
without prior notice.**

The above specifications are for the stand-alone sensor only, not the installation it is utilized with.

Misleading specifications

When Aanderaa states an absolute accuracy of e.g. (±1.5% or ±2 µM) we mean the accuracy of the sensor in the field over the entire range of oxygen concentrations and temperatures, others might refer to accuracy in the laboratory just after the sensor was calibrated. When Aanderaa give response time in water others refer to response time in air which is much faster. For more information read our [Best Practice document](#) on Oxygen Optodes.



Aanderaa.com/URL